

3.7 MONITOR (15" or 17")

- Remove the protection behind the keyboard , unscrewing two screws (see figure 48) and sliding the plastic panel
- remove the block for the power supply and the signal cable (see figure 49)

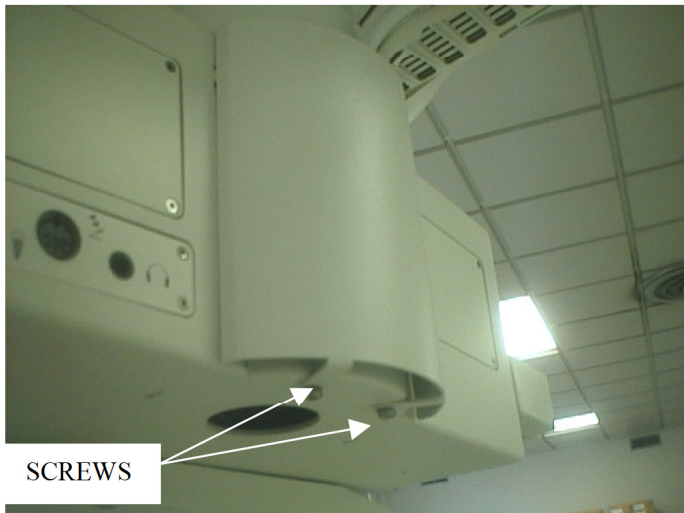


Figure 48

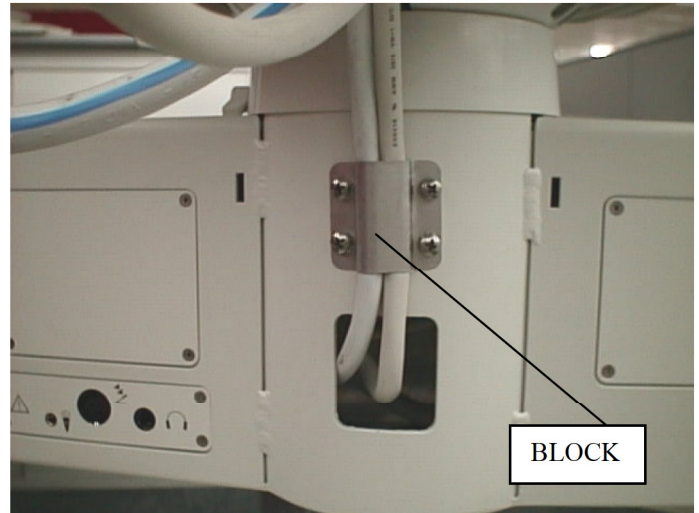


Figure 49

- pull out the monitor cable. It is connected to a video signal cable (see figure 50); disconnect it . Disconnect the power supply cable from the monitor plug

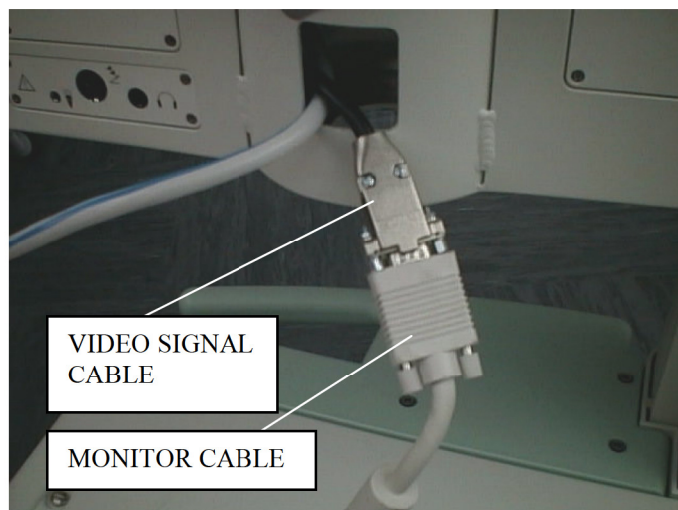


Figure 50

In the circular support are present three screws fixed to it with nuts. The support is directly connected to the monitor itself.