


# LABEXIM PRODUCTS

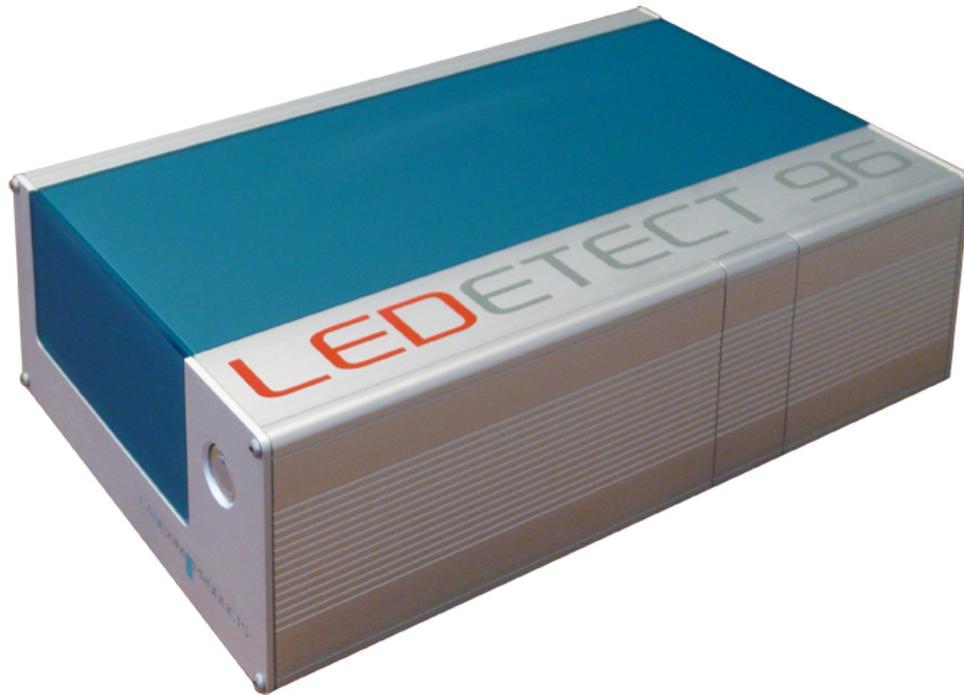


## LEDETECT96

LED based 8 channel Microplate Absorbance Reader

- ◆ LED Technology
- ◆ 340nm - 900nm
- ◆ Low Power Consumption
- ◆ Automatic Wavelength Detection
- ◆ No more lamp replacements
- ◆ 98/79/EC IVD

# LEDETECT 96

designed in Austria , assembled in Germany

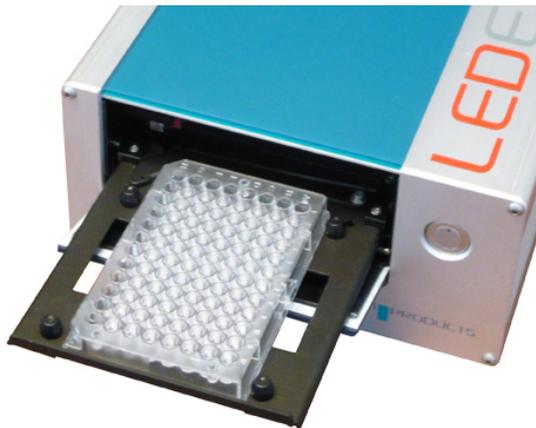

LEDETECT 96 is a computer controlled microplate reader for 96 well plates. Easy and safe operation take away the hassle from your daily microplate reading jobs. It is based on the most modern LED technology, no need to worry about lamp replacements anymore.

**LED Technology:** Instead of lamps and filters, LEDETECT 96 is fitted with up to 6 intelligent, wavelength specific LED-plugins. Each plugin contains its own digital ID, LED-light source, filter and lenses in one easily exchangeable component.

**Low power consumption:** In times like these, low power consumption must be a key issue with any electrical devices. With a maximum consumption of 12W during reading and a standby consumption of not more than 2W, LEDETECT 96 again is setting new standards.


**Unrivaled optical performance:** Using LED's as light source moves all those known problems with halogen lamps used in other readers to history. Modern LEDs are known for their high and extremely stable light energy paired with very low energy consumption at no heat development.

**Intelligent LED Plugins:** Adding new wavelengths (e.g. 340nm) or exchanging existing ones is as easy and safe as 1-2-3. Auto-recognition of the individual plugins takes away the worry about filter positions in the reader.

**Computer Controlled:** LEDETECT 96 is fully computer controlled. Capture 96 (included) allows to read plates and collect the raw OD data from the reader. With its clipboard function, it allows to paste raw data into any spreadsheet program for further calculations.

All these great features combined in one product make LEDETECT 96 the next generation microplate reader of your choice!

- ▶ LED technology
- ▶ Unrivaled optical performance
- ▶ intelligent LED-plugins
- ▶ UV ready (340nm)
- ▶ Easy and safe operation
- ▶ Computer controlled



Parameter	Value
Plate Types	96 well, round, flat or V- shaped bottom
Optical system	8 channel absorbance photometer
Light source	Wavelength specific LED
Photodetector	8 Silicon photodiodes
Wavelength range	340 - 900nm
Resolution	0.1 mOD (0.0001 OD)
Indication range	0.000 - 4.000 OD (Abs)
Accuracy	≤± 1% and ± 0.005 OD to 3.5 OD (any wavelength)
Linearity	≤± 0.5% and ± 0.005 OD to 3.5 OD (any wavelength)
Reproducibility	≤± 0.5% and ± 0.005 OD to 3.5 OD (any wavelength)
Meas. Mode	Single and dual wavelength, standard reading or linear scan (30 points/well)
Reading speed	5 seconds (kinetic interval, single wavelength) 10 seconds (96 well, dual wavelength)
Wavelengths	4 wavelengths onboard (405, 450, 492, 620nm) up to 6 possible (340 – 900)
Shaking	4 Shaking modes
PC-Interface	USB 2.0
PC Software	Capture96 included MikroWin 2010 demo version included
Dimensions	23cm x 12cm x 36cm (W x H x L)
Weight	6.7 kg net / 8.5 kg gross
Housing	Anodized Aluminium with Acrylic components
Power requirements	24VDC, 2.5A Consumption: 2W stdby / 12W operation max
CE	98/79/EC IVD CE
Scope of Supply	Power adapter 100-240V, 50/60 Hz, USB Cable, 4 Standard Filters, User manual (CD), Capture96 Control Software, MikroWin2010 demo version
Ordering info	WR-302-02 Ledetect96 Microplate Reader WR-302-xxx LED plugin (xxx = nm)

