CONNECTION DIAGRAM

EMPTY
BLACK
WHITE
RED

Picture 3
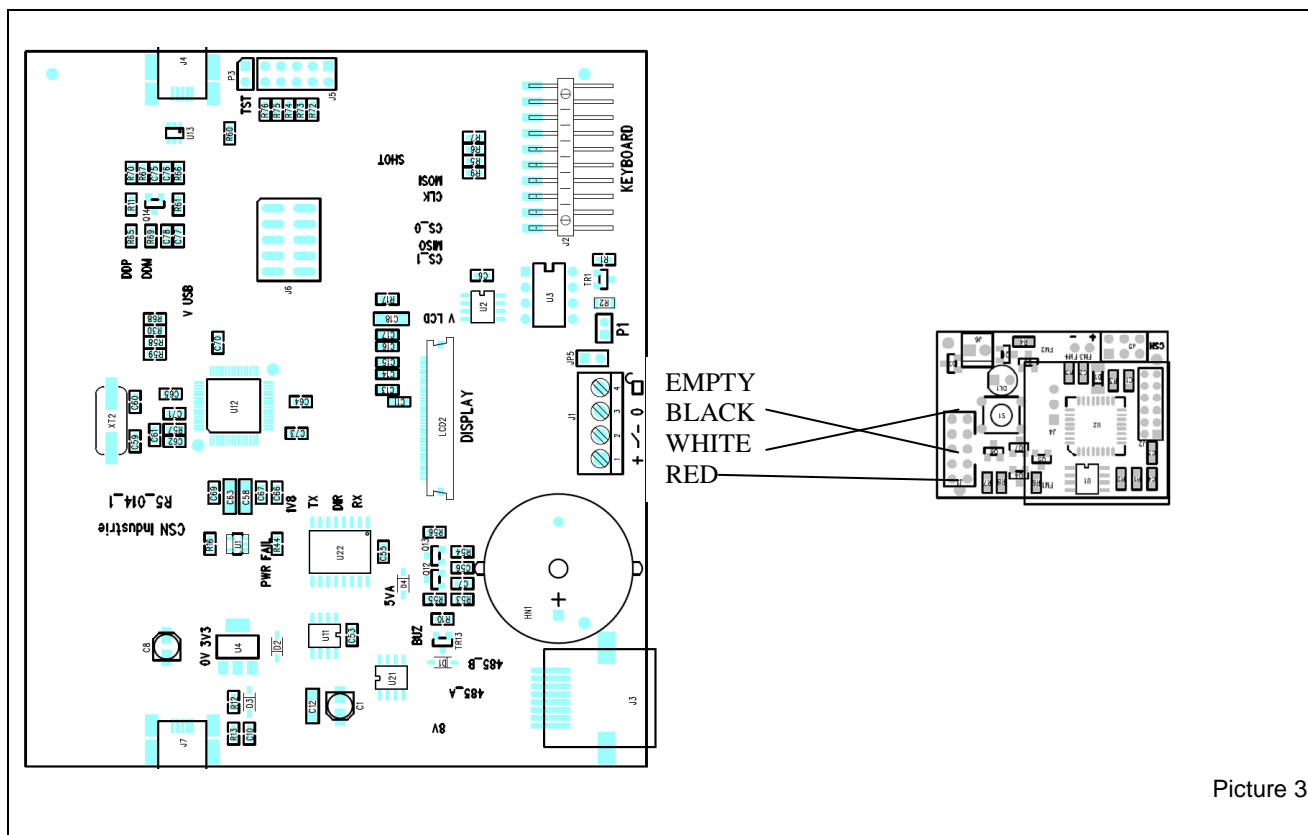
PART II

INSTALLATION OF THE RECEIVER MODULE: INSTRUCTIONS

In some MAX70 systems the receiver module (pic. 1), is installed before the selling.
In this case you can find it in the position indicated in pic.1 **(F)**.
If you have received the receiver module separately it is necessary to install it before using.

1. Turn off MAX70
2. Take out the carter from user interface
3. Identify 4 poles terminal block **J1 (G)** on CPU board (picture 1)
4. Connect three wires like indicated in picture 3
5. Fix the receiver module on the spacer using the plastic screw included in the packaging or with a screw with a plastic washer (ref. E in picture 1)
6. Close again the carter