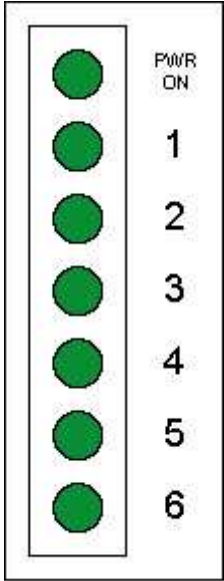


## Verifying Operation of the Using LEDs


### Verifying Operation of the AC/DC Power Supply

Check the LEDs on the AC/DC Power Supply and use (Tab. 1 / p. 5) and (Tab. 2 / p. 6) as guides.


Tab. 1 AC Power LED Descriptions

	PWR ON = AC Power Supply Power On
	1 = OTP Status
	2 = OVP Status
	3 = OCP Status
	4 = FANS Status
	5 = AC Status
	6 = DC Status


Tab. 2 AC Power LED Indicators

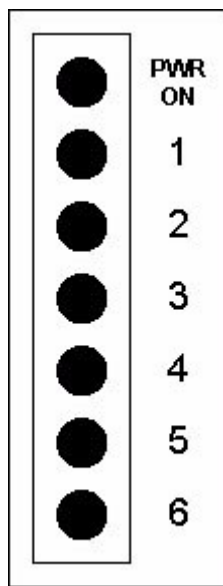


Power Off

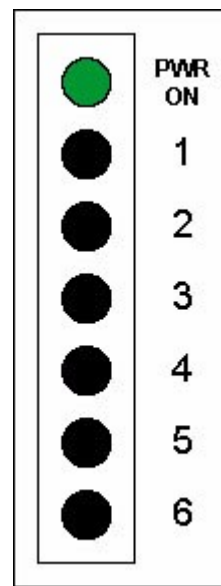


Power on, system in standby  
System Operational

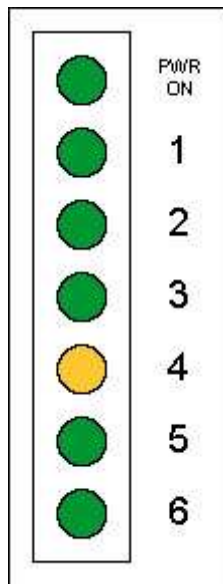


Fans problem  
One of the four fan fail. CPPSSW-bit alert C/P

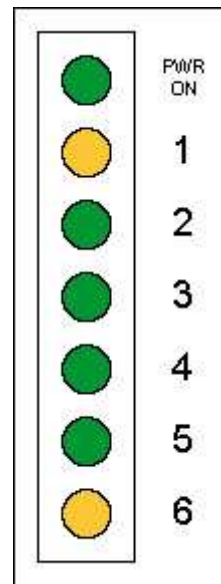


DC has reported an internal error: overtemp fault  
DC power has over temperature range over 80 degree C. System to shut off.

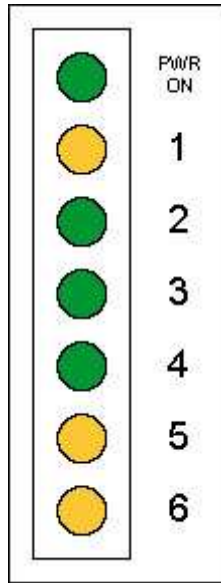


AC has reported an internal error: overtemp fault  
AC power has over temperature range over 80 degree C. System to shut off.

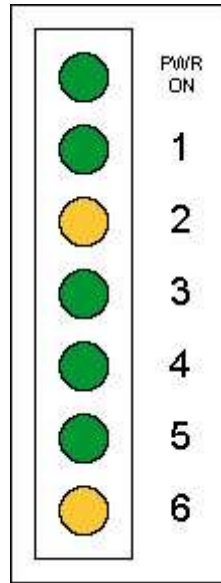


DC has reported an internal error: over voltage fault  
DC power has over voltage range over 140%. System to shut off.

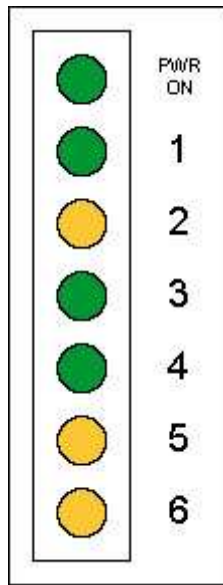

AC has reported a  
internal error: over  
voltage fault  
AC power has over  
voltage range over  
140%. System to  
shut off.

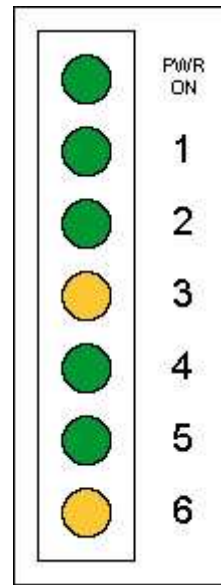

DC has reported  
an internal error:  
over current fault  
DC power has over  
current range over  
150%. System to  
shut off.

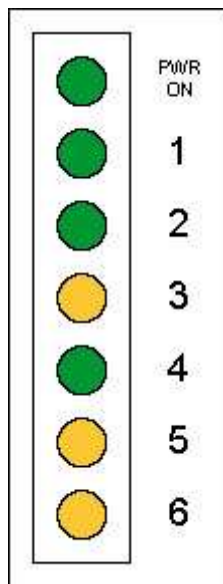

AC has reported  
an internal error:  
over current fault  
AC power has over  
current range over  
150%. System to  
shut off.

**Verifying Operation of the I/O Panel**

Check the LEDs and use [\(Tab. 3 / p. 9\)](#) and [\(Tab. 4 / p. 9\)](#) as a guide.